

SPACE OPERATIONS DIGEST

CENTER FOR ORBITAL AND REENTRY DEBRIS STUDIES

VOL. 3, NO. 2

MARCH 2004

The Loss of Lewis Spacecraft

Editor's Note

Three days after launch, NASA's Lewis Spacecraft lost ground contact and subsequently re-entered. The failure is recounted below (a full report is available on-line at http://arioch.gsfc.nasa.gov/300/html/lewis_document).

Background


A trailblazer for NASA's fast-track acquisition approach, the satellite was developed in a branch office of TRW. It was launched into a 300-km parking orbit for initial checkout in August 1997.

Unattended Safe Mode Operation

Soon, a series of anomalies occurred. Controllers put the satellite in the safe mode and, after operating trouble-free for several hours, left for a 12-hour break.


Safehold Mode Design Deficiency

The spacecraft relied on a single two-axis gyro for attitude control in safe mode. This gyro only sensed rotation about the major and minor axes, and could not handle torques around the intermediate axis, an inherently unstable situation.

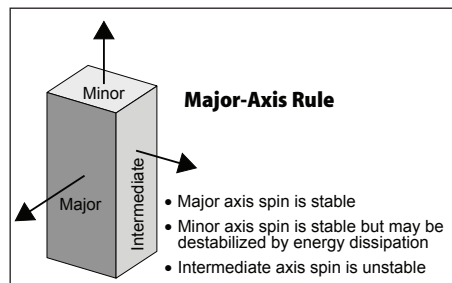

Loss of Control

A small imbalance (probably in thruster or mass properties) caused Lewis to spin up around the intermediate axis. The thrusters autonomously fired to try to arrest the disturbance, but the firings occurred so often that the watchdog timer — designed to preserve fuel — shut the thrusters down. The satellite entered a flat spin around its principal axis. The solar arrays turned edge-on towards the Sun, and power was lost. When the operators returned, the battery was depleted.

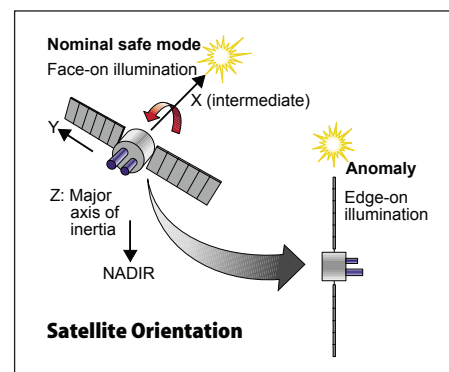

Why the Lapse Escaped Reviews

The Lewis attitude-control engineers reused a design from a simpler satellite, without accounting for the much more complex mission profile. When NASA's Investigation Board visited TRW's main campus, they discovered that the engineers there in fact used multiple gyros in similar safe mode, in anticipation of instability. If experienced peers had reviewed Lewis, they would have caught the vulnerable, one-gyro design.

Lack of Ground Attendance

Controllers opted to leave the satellite unattended for hours, presuming that stability in the eventual mission orbit (523 km) had been demonstrated. Unfortunately, steadiness in the lower parking orbit, where atmospheric drag is much more severe, had not been validated. Later, a simulation confirmed that attitude control would be lost in a few hours.

Lessons Learned

- › Controllers should be continuous present during spacecraft initialization.
- › Analyze the effect of anomalies in all operating modes.

This newsletter is published by The Aerospace Corporation, a nonprofit corporation established in 1960. Through its Center for Orbital and Reentry Debris Studies (CORDS), Aerospace provides specialized operations support to the space community. By special arrangement, Aerospace can assist operators track and analyze anomaly data, perform troubleshooting, provide consulting service, and distribute operation alerts.

For more information, please email CORDS@aero.org.



The Aerospace Corporation
 2310 E. El Segundo Blvd.
 El Segundo, California
 90245-4691 USA
 310.336.5000 phone

www.aero.org